



Type AF
Locating bearing

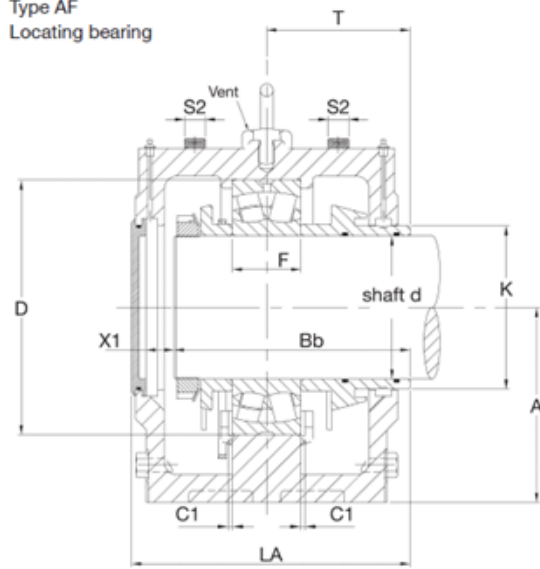


Type BF
Locating bearing

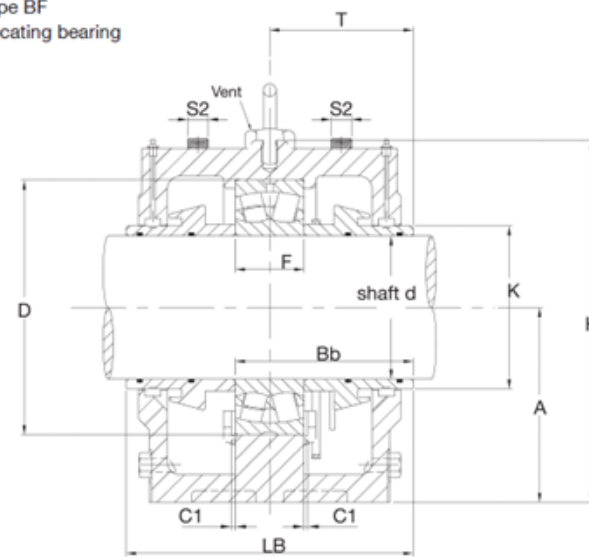

Type AL
Non-Locating bearing

Type BL
Non-Locating bearing

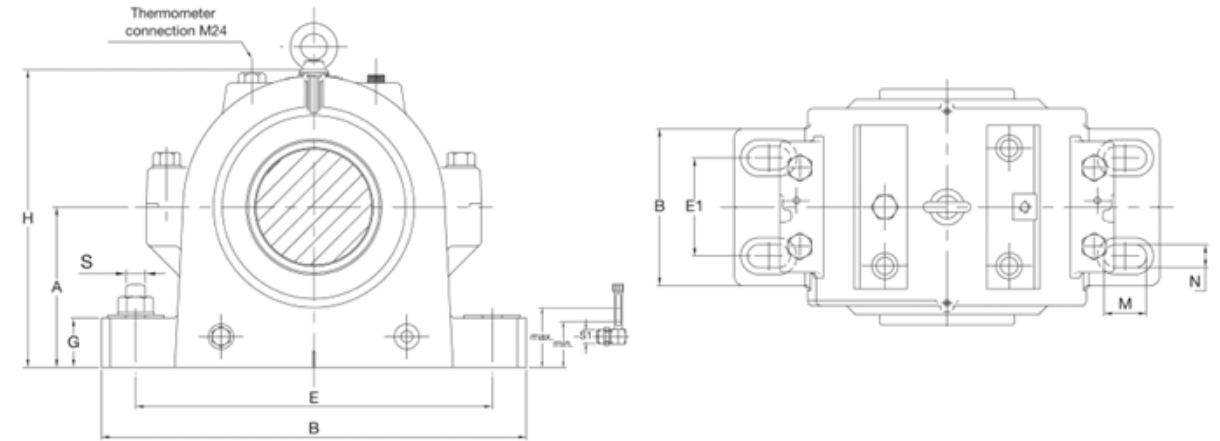

HOUSING NO	SHAFT DIA. d	DIMENSIONS mm																Other dimensions		BEARING NO.	Adapter sleeve Designation	Level		HOUSING NO.				
		D	B	b	G	F	A	H	E	E1	LA	LB	C1	K	M	N	T	S	S1			S2	X1		Ba	max	min	
		mm	in																									
SOFN 517	75	150	330	110	35	36	125	230	260	60	180	180	5	96	40	24	90	20	3/4	G1/2	G3/8	35	40	22217 CCK/C3W33	H317	63	42	SOFN 517
SOFN 518	80	160	360	120	45	40	135	245	290	70	187.5	190	5	100	40	24	95	20	3/4	G1/2	G3/8	35.5	42	22218 CCK/C3W33	H318	68	45	SOFN 518
SOFN 520	90	180	400	130	50	46	145	270	320	75	203	206	5	110	45	28	103	24	1	G1/2	G1/2	39	46	22220 CCK/C3W33	H320	70	50	SOFN 520
SOFN 522	100	200	420	145	50	53	160	290	347	75	219.5	229	5	120	45	28	114.5	24	1	G1/2	G1/2	33	52	22222 CCK/C3W33	H322	77	50	SOFN 522
SOFN 524	110	215	420	170	55	58	170	315	347	90	263	276	8	135	45	28	138	24	1	G1/2	G1/2	49	56	22224 CCK/C3W33	H3124	80	60	SOFN 524
SOFN 526	115	230	450	180	60	64	180	335	377	100	260	270	8	145	45	28	135	24	1	G1/2	G1/2	47	58	22226 CCK/C3W33	H3126	85	60	SOFN 526
SOFN 528	125	250	500	190	65	68	190	355	415	100	269.5	280	8	160	45	35	140	30	1-1/4	G1/2	G3/4	46.5	63	22228 CCK/C3W33	H3128	85	60	SOFN 528
SOFN 530	135	270	540	190	65	73	200	380	450	115	269.5	280	8	170	50	35	140	30	1-1/4	G1/2	G3/4	43.5	66	22230 CCK/C3W33	H3130	90	60	SOFN 530
SOFN 532	140	290	560	205	65	80	215	405	470	120	305.5	316	10	178	50	35	158	30	1-1/4	G1/2	G3/4	54.5	73	22232 CCK/C3W33	H3132	95	65	SOFN 532
SOFN 534	150	310	610	230	70	86	235	440	515	130	340	350	10	195	55	35	175	30	1-1/4	G1/2	G3/4	58	77	22234 CCK/C3W33	H3134	105	75	SOFN 534
SOFN 536	160	320	650	240	75	86	245	455	545	150	350	360	10	205	65	35	180	30	1-1/4	G1/2	G3/4	62	78	22236 CCK/C3W33	H3136	115	80	SOFN 536
SOFN 538	170	340	720	250	85	92	260	480	590	150	360	370	12	220	70	42	185	36	1-1/2	G1/2	G3/4	63	82	22238 CCK/C3W33	H3138	120	85	SOFN 538
SOFN 540	180	360	730	260	85	98	275	510	600	160	366.5	378	12	227	70	42	189	36	1-1/2	G1/2	G3/4	61.5	86	22240 CCK/C3W33	H3140	125	85	SOFN 540
SOFN 544	200	400	820	280	95	108	305	565	670	180	389.5	404	12	255	80	42	202	36	1-1/2	G1/2	G3/4	62.5	95	22244 CCK/C3W33	OH3144 HB	140	95	SOFN 544
SOFN 548	220	440	900	290	100	120	340	625	740	190	412.5	420	12	270	80	42	210	36	1-1/2	G1/2	G3/4	67.5	105	22248 CCK/C3W33	OH3148 HB	155	110	SOFN 548